



# EOS Compact DP

## Sauna control unit for dry sauna operation. For private and commercial use.

Electronic control unit for dry Finnish sauna operation. Compact series feature a modern, slim design housing with a wide range of functions. Compact DP is ideal if you need a simple to use yet modern control unit with all essential functions. Suitable for commercial and private use.

### Your advantages:


- Large colour 3,5" TFT display.
- Modern, slim design housing, only 65 mm depth
- 10 kW switching capacity.
- Easy installation, very simple to use
- 4 user profiles with pre-programmed settings
- Output for light and fan, numerous additional functions
- Made in Germany - quality by EOS

### Specifications and features:


Housing:	Plastic, white or anthracite design
Temperature control:	30 - 115 °C
Heating time limitation:	6 h, 12 h, 18 h or unlimited
Time preselection:	yes, up to 24 h
Dimensions (HxWxD):	220 x 255 x 65 mm
Switching capacity:	10 kW, extendable
Light output:	230V 1N ~, max 100 W
Fan output:	230V 1N ~, max 100 W
Power supply:	400 V 3N ~ 50 Hz
Installation:	Wall-mounting or semi-recessed
Other functions:	Holiday home mode, 4 user profiles, EOSafe support, error messages and others.




## Connection overview

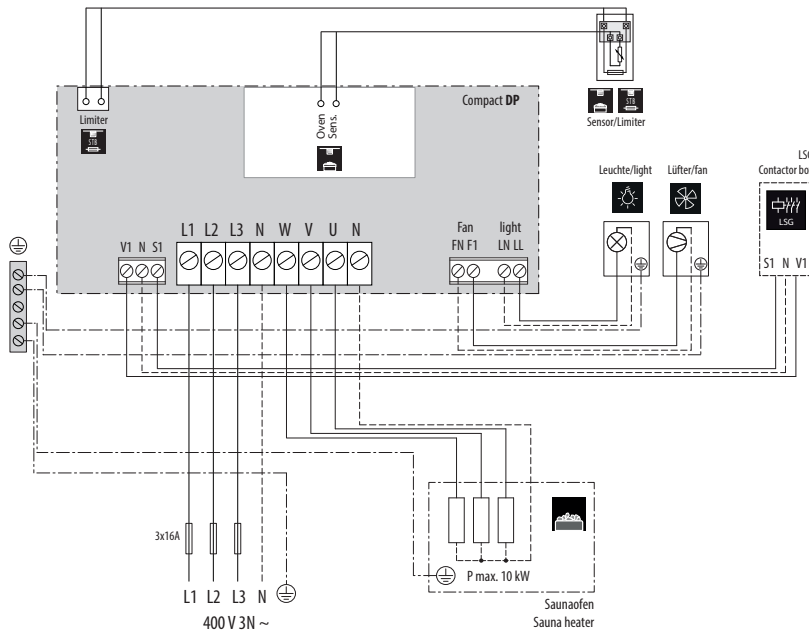

## Installation



## Sensor installation

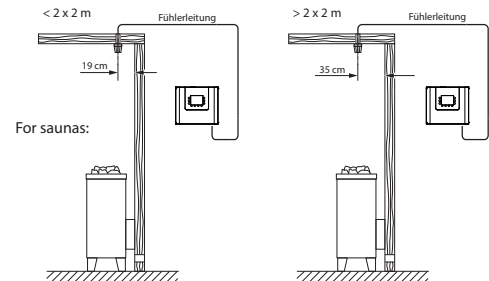

## Spare parts and accessories

Description	Item no.
Additional high limiter beige	94 7443
Additional high limiter anthracite	94 7444
Temperature sensor beige	94 7437
Temperature sensor anthracite	94 7438

## Technical specifications

Item no.	Colour	Electrical connection	Switching capacity	Power extension via LSG unit	Temper. control range	Output for light and fan	Heating time limitation	Dimensions H/W/D in cm	Ambient temperature in operation	Weight without packing
94 7431	anthracite	400 V 3N ~ 50Hz	10 kW, extendable	yes	30 - 115 °C	max. 100 W each	6 h, 12 h, 18 h, ∞	22 / 25,5 / 6,5	-10 to +40 °C	1,2 kg
94 7427	white									